

# Technical specifications



## Chassis

- Frame profile 90 x 50 mm
- Outside length 785 mm
- Outside width incl. lever 720 mm
- Steel tube frame, powder-coated elegant anthracite matte finish
- Brake operable from both sides and acting on two castors each; two castors featuring independent directional steering function
- Double rimmed castors  $\varnothing$  125 mm
- Detachable foot keypad (total, head up/down)
- Emergency stop button
- Visible screws are made of stainless steel
- With equipotential bonding connection

## Upper frame

- 4-part support frame (head, back, seat, leg part)
  - Removeable upholstery
  - Width of upholstery 610 mm
  - Width incl. armrests 850 mm
  - Length 1.760 – 1.900 mm  
(incl. legrest extension) + 190 mm
- |                     | Angle     | Dimensions (L x W)  |
|---------------------|-----------|---|
| • Head part         | -29°/+35° | 255 x 245 mm  |
| • Back part         | 0°/+83°   | 610 x 610 mm  |
| • Seat part         | -5°/+35°  | 450 x 610 mm  |
| • Leg part          | 0°/-77°   | 510 x 610 mm  |
| • Height adjustment |           | 625 – 925 mm<br>(comfort) 655 – 955 mm<br>(2x) 470 x 75 mm  |
| • Armrests          | 0°/+180°  |   |
| • Entry height      |           | (standard) 580 mm/500 mm (incl. legrest extension)<br>(comfort) 610 mm/530 mm (incl. legrest extension) |
| • Legroom           |           | 520 – 820 mm  |
| • Trendelenburg     |           | -12°/Reverse Trendelenburg +5°  |

## Electrical control

- All components according to IP54
- Hand control with 8 individually programmable memory positions, auto run function, reset button
- Foot keypad with 4 foot switches and reactivation button

## Electric Drives

- Head, back, seat, leg part, total up/down
- Trendelenburg/Reverse Trendelenburg

## Lifting column

- Max. lifting 300 mm
- Max. load 250 kg
- Motors IP54 with HAL sensors, to be memorized


## Trendelenburg/Reverse Trendelenburg/CPR



## Back part/leg part



## Height adjustment

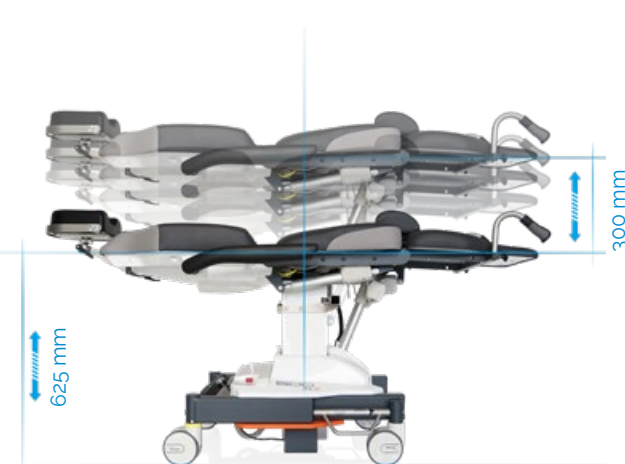

### Powerful accumulators

- Battery box with 2 batteries (lead-gel), pollution free, maintenance-free, cadmium-free 2 x 12 V, 7,2 Ah
- As back-up-system exchangeable without tools
- Acoustic low voltage signal for discharge protection
- Universal battery charger Input: 100 – 240 V  
Output: 30 V

#### Operating time per battery charge

- Measured by operating circle (Prepare-Operate-Recover) 100 OPs
- Quantity of operating circles depends on individual operation

### Mains-free operation

Easy recharging of the equipment thanks to charging adapter and integrated battery charger circuit board.



### Simple battery replacement

Additional safety due to replaceable battery box (back-up system **Item No.:** 3047 0000). Discharged battery box can be replaced quickly.



### Further technical details

- Chair has detachable, swiveling armrests made completely with PUR foam
- Detachable seat for service friendly access to electric components

Max. load 250 kg

Weight 135 kg

Subject to technical modifications.

### Equipment protection

#### Cover drape *stayClean*

2,000 x 730 mm, box á 160 Pieces  
4 x 40 Pieces

**Item No.:** 3034 0014

Page 64



### Upholstery/color card

#### Standard color

**500 XL** anthracite **Item No.:** 3037 0052

**500 XLE comfort** anthracite (main color)  
+ chrome (accent color)  
**Item No.:** 3037 0092

#### "skai Tundra"

Page 102

#### "skai Pandoria Plus"

Page 103

