

## General

- Comfortable three-piece cover surface
- Wide and comfortable upholstery in anthracite
- Low entry height
- Suitable even for very tall patients



## Technical specifications

### Chassis

- Frame profile 50 x 50 mm
- Outside length 1,530 mm
- Outside width 750 mm
- Castor, electrically conductive ø 150 mm

### Lifting column

- Foot hydraulic
- Height adjustment min./max. 650/1,030 mm
- Max. lifting force 2,000 N
- Leg part lifting force 1,500 N
- Back part lifting force 1,200 N
- Head part lifting force 500 N
- Operating pressure 120 bar
- Hydraulic oil, DTE 10 EXCEL 32 approx. 0.7 liter

### Upper frame

- 3-part support frame (head, back, leg part)
- Upholstery 80 mm
- Length 1,930 – 2,060 mm
- Width 700 mm
- Head part angle adjustment  $-28^{\circ}/+21^{\circ}$
- Back part angle adjustment  $-13^{\circ}/+58^{\circ}$
- Leg part angle adjustment  $0^{\circ}/+13^{\circ}$
- Trendelenburg  $-13^{\circ}$
- Height adjustment range 380 mm
- Standard stainless steel side rails, both sides 25 x 10 mm
- Entry height 650 mm
- Legroom surgeon 500 – 880 mm

**Max. load** 175 kg

**Weight** 140 kg


Subject to technical modifications.

## Technical dimensions

### Trendelenburg



### Back part

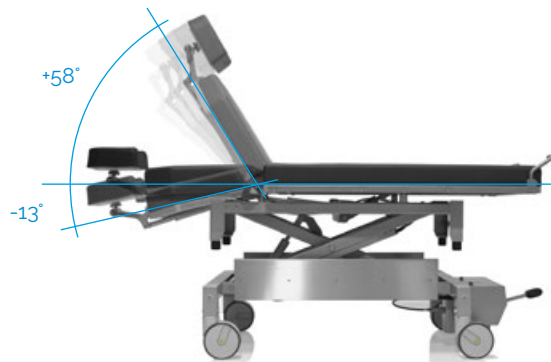

### Height adjustment



Specifications in mm