


Highly functional, basic hydraulic surgical table

400 XL

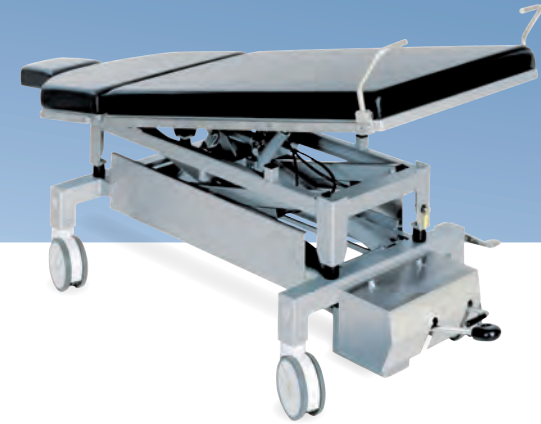


- Smooth and safe hydraulic system for head, back and leg positioning
- Double-wheel casters, 360° rotating
- Generous legroom allows the surgeon flexible positioning and optimal patient access
- Steering caster for comfortable and easy manoeuvring by one person from either the head or foot-end
- Trendelenburg / Reverse Trendelenburg position
- Central braking lever works on all four wheels
- Ultra tough, high-stability steel base, double powder coated for 175kg (385lbs) patient weight capacity
- 3-part support frame - head, back, foot with durable upholstery
- 25x10mm standard rails included

400 XL



Flexible, adjustable headrest.

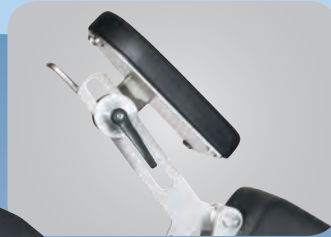

Ergonomic push handles.



Simple to use pedal for total hydraulic up/down adjustment - guaranteed long-lasting.



Central braking system effective on all four wheels.



Standard color black



Specifications 400 XL

Chassis

Frame profile	50 x 50 mm
Outside length	1,100 mm
Outside width	700 mm
Caster, electrically conductive	Ø 150 mm

Lifting Column

Foot hydraulic	
Height adjustment min./max.	650/1,030 mm
Max. lifting force	2,000 N
Footrest section	1,500 N
Backrest section	1,200 N
Headrest section	500 N
Operating pressure	120 bar
Hydraulic oil, HLP ISO VG 46	approx. 0.7 liter
Ambient temperature range	0 to +60 °C

Upper Frame

3-part support frame (head, back, foot)	
Length	2,000 - 2,050 mm
Width	650 mm
Foot adjustment	0/+15 °
Back adjustment	-15/+55 °
Head adjustment	-25/+25 °
Trendelenburg/Reverse Trendelenburg	-13/0 °
Height adjustment range	380 mm
Standard stainless steel side rails, on both sides	25 x 10 mm
Upholstery, electrically conductive	80 mm

Max. Load 175 kg / 385 lbs



Weight 120 kg / 265 lbs

The mobile 400 XL surgical table, our popular basic model, is built on functional, easy-to-use technology. Unlike electro-mechanical tables, the mobility and operation of the 400 XL is manual-hydraulic, and is therefore not dependant on the use of batteries. This alternative reduces overall costs while still providing excellent usability. This table represents one of our original product lines, with many still successfully in service after 25 years of continuous use.

Accessories



For the entire list of accessories please go to pages 62 to 66

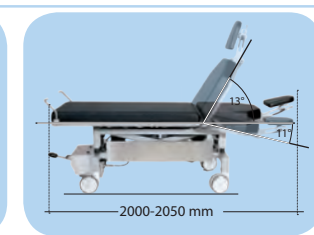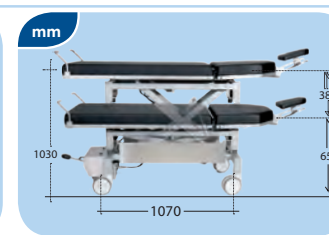

400 XL